

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
6 October 2005 (06.10.2005)

PCT

(10) International Publication Number
WO 2005/093296 A1

(51) International Patent Classification⁷: **F16H 63/06**

(21) International Application Number:
PCT/IB2005/000697

(22) International Filing Date: 18 March 2005 (18.03.2005)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
2004-085688 23 March 2004 (23.03.2004) JP

(71) Applicant (for all designated States except US): **TOYOTA JIDOSHA KABUSHIKI KAISHA** [JP/JP]; 1, Toyota-cho, Toyota-shi, Aichi-ken, 471-8571 (JP).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **NOZAWA, Hirofumi** [JP/JP]; c/o Toyota Jidosha Kabushiki Kaisha, of, 1, Toyota-cho, Toyota-shi, Aichi-ken, 471-8571 (JP).


IBARAKI, Ryuji [JP/JP]; C/o Toyota Jidosha Kabushiki Kaisha, of, 1, Toyota-cho, Toyota-shi, Aichi-ken, 471-8571 (JP). **OKADA, Takuya** [JP/JP]; c/o Toyota Jidosha Kabushiki Kaisha, of, 1, Toyota-cho, Toyota-shi, Aichi-ken, 471-8571 (JP). **HOJO, Yasuo** [JP/JP]; c/o Toyota Jidosha Kabushiki Kaisha, of, 1, Toyota-cho, Toyota-shi, Aichi-ken 471-8571 (JP).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH,

[Continued on next page]

(54) Title: BELT TYPE CONTINUOUSLY VARIABLE TRANSMISSION

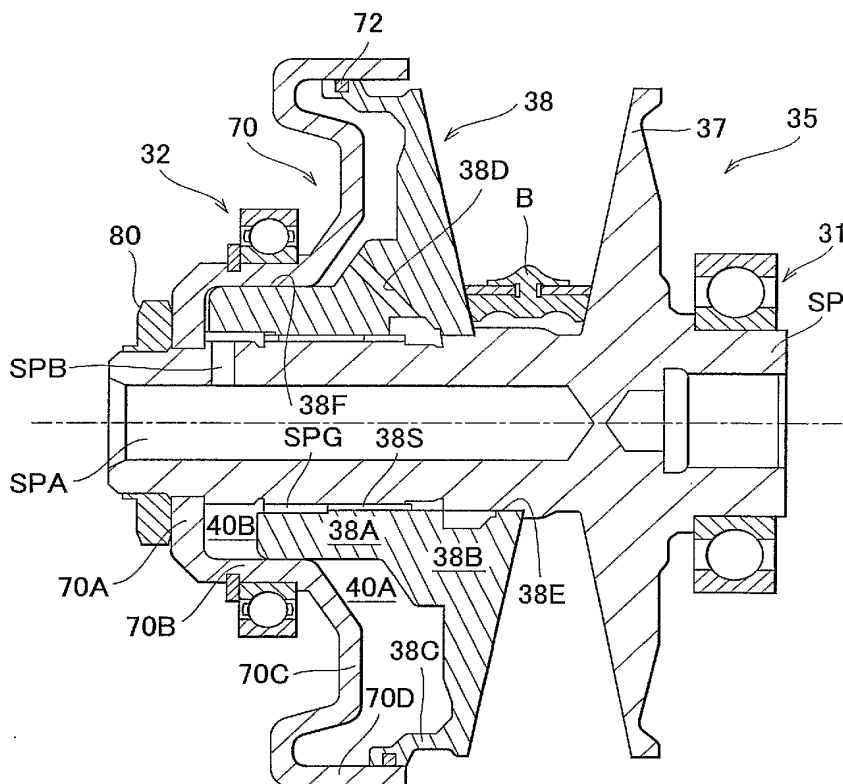

(57) Abstract: In a belt type continuously variable transmission in which a pulley shaft (SP) is supported by bearings (31, 32) provided at two positions that are apart from each other in an axial direction of the pulley shaft (SP) and a supply oil passage for supplying hydraulic fluid to a pulley hydraulic chamber (40A, 40B) includes a radial direction oil passage (SPB) that is formed in the pulley shaft (SP), the radial direction oil passage (SPB) is formed on an outside of an area between the above-mentioned two positions. Also, one of the bearings (32) is provided near the radial direction oil passage (SPB) and on an outer surface side of a cylinder member (70) whose inner surface side forms the pulley hydraulic chamber (40B) for a movable sheave (38) that is fixed to the pulley shaft (SP). With this structure, concentration of stress on the radial direction oil passage can be avoided, and therefore strength of the pulley shaft can be secured.



GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.